




Lighting
Technologies

LT MAZE SIGNAGE PRODUCT RANGE

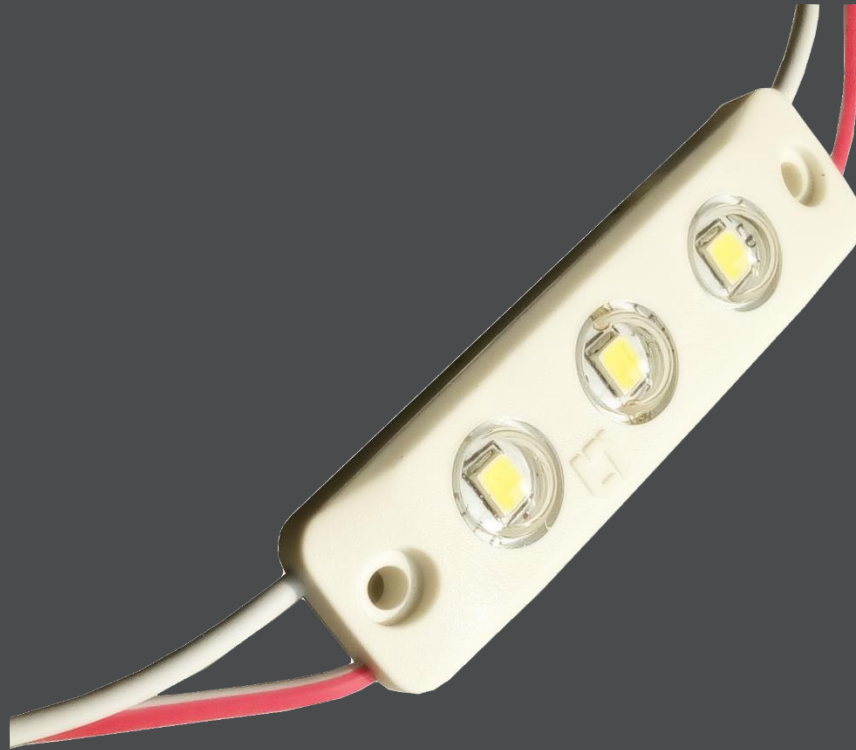

MAZE- Signage Lighting

MAZE SL

- Solution for small and shallow depth channel letters
- Wattage as low as 0.36W/Module
- As Shallow as 1.5Inch Channel depth
- Uniform light across a large surface area
- Overmolded design protects components from damage
- Clear Secondary lens to cover the LED source
- Module Viewing angle- 120'
- Low-voltage 12VDC system
- Easy installation with industrial-grade mounting tape and also pre-drilled mounting holes provided
- Cool white, Neutral White & Warm white Color options
- Long rated life of 50k hours
- IP66 Protection

MAZE MH

- Solution for Medium depth channel letters
- Wattage/Module is 0.5-0.72W
- Uniform light across a large surface area
- Overmolded design protects components from damage
- Clear Secondary lens to cover the LED source
- Module Viewing angle- 120'
- Low-voltage 12VDC system
- Easy installation with industrial-grade mounting tape and also pre-drilled mounting holes provided
- Cool white, Warm white , Red & Blue Color options
- Long rated life of 50k hours
- IP66 Protection

MAZE XL

- Solution for large depth channel letters & Box signs
- Wattage/Module is 1.44W
- Uniform light across a large surface area
- Overmolded design protects components from damage
- Clear Secondary lens to cover the LED source
- Module Viewing angle- 120'
- Low-voltage 12VDC system
- Easy installation with industrial-grade mounting tape and also pre-drilled mounting holes provided
- Cool white, Warm white , Red & Blue Color options
- Long rated life of 50k hours
- IP66 Protection

MAZE- Signage Lighting

| PRODUCT | MAZE | | | | | | | | |
|-----------------|--------------------------|-------|-------|-----------------------|-------|------|------|-------------|-------|
| APPLICATION | Low depth Channel Letter | | | Mid depth/ Box letter | | | | Box letters | |
| VERSION | MAZE SL | | | MAZE MH | | | | MAZE XL | |
| Options | 6500K | 4000K | 3000K | 6500K | 3000K | BLUE | RED | 6500K | 3000K |
| Modules/Ft | 2.5 | 2.5 | 2.5 | 2 | 2 | 2 | 2 | 1.5 | 1.5 |
| Modules/Mtr | 8 | 8 | 8 | 6.5 | 6.5 | 6 | 6 | 5 | 5 |
| Wattage/ Module | 0.36W | 0.36W | 0.36W | 0.72W | 0.72W | 0.5W | 0.5W | 1.44W | 1.44W |
| Lumens/Module | 40 | ~40 | ~40 | 78 | ~75 | 12 | 19 | 144 | 140 |
| Lumens/Watt | 110 | 105 | 100 | 108 | ~100 | 23 | 37 | 100 | 100 |
| Modules/ Box | 250 | 250 | 250 | 200 | 200 | 100 | 100 | 150 | 150 |
| Mounting Pitch | 45mm | | | 63mm | | | | 97mm | |


MAZE- Order details

| PRODUCT | SKU | CCT | Wattage (W) |
|------------|----------------|-------|-------------|
| LT MAZE SL | LTMAZESL65SV00 | 6500K | 0.36 |
| | LTMAZESL40SV00 | 4000K | 0.36 |
| | LTMAZESL30SV00 | 3000K | 0.36 |
| LT MAZE MH | LTMAZEMH65SV00 | 6500K | 0.72 |
| | LTMAZEMH30SV00 | 3000K | 0.72 |
| | LTMAZEMHRSV00 | Red | 0.5 |
| | LTMAZEMHBSV00 | Blue | 0.5 |
| LT MAZE XL | LTMAZEXL65SV00 | 6500K | 1.44 |
| | LTMAZEXL30SV00 | 3000K | 1.44 |



MAZE- Driver details

| SKU | DESCRIPTION | Wattage |
|-------------|---|---------|
| DSO02012V00 | LT 20W 12V Constant Voltage Outdoor Driver | 20W |
| DSO06012V00 | LT 60W 12V Constant Voltage Outdoor Driver | 60W |
| DSO10012V00 | LT 100W 12V Constant Voltage Outdoor Driver | 100W |
| DSO15012V00 | LT 150W 12V Constant Voltage Outdoor Driver | 150W |


MAZE- Dimension Dwg

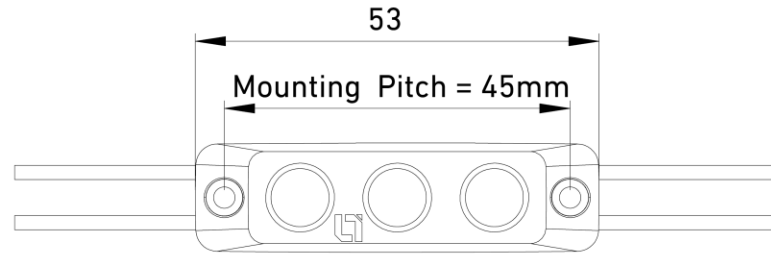


LT MAZE SL

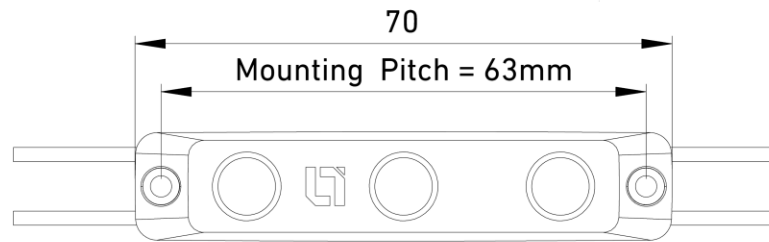

LT MAZE MH



LT MAZE XL



- UL Certified
- CE standard: EN60231, EN62471
- LM-79 for system
- LM-80 for LED chip
- ROHS Compliant



 Experience Light